

# PRODUCT SPECIFICATIONS

| Model                        | TT-6518VN   | TT-7518VN                           | TT-8618VN                           |
|------------------------------|---|-------------------------------------|-------------------------------------|
| Backlight                    | LED   |                                     |                                     |
| Display Area                 | 1428.5 x 803.5mm  | 1650 x 973mm                        | 1895.04 x 1065.96 mm                |
| Active Screen Size           | 65"   | 75"                                 | 86"                                 |
| Display Ratio                | 16:9  |                                     |                                     |
| Resolution                   | 3840 x 2160 Pixels  |                                     |                                     |
| Display Colors               | 10-bit  |                                     |                                     |
| Brightness                   | 370nit  |                                     |                                     |
| Contrast                     | 4000:1  |                                     |                                     |
| Response Time                | 8ms   |                                     |                                     |
| Viewing Angle                | 178°  |                                     |                                     |
| Speaker position             | Forward   |                                     |                                     |
| Max.Power Output             | 2 x15W  |                                     |                                     |
| Power Consumption            | Maximum <220W<br>Standby Mode ≤0.5W   | Maximum <300W<br>Standby Mode ≤0.5W | Maximum <450W<br>Standby Mode ≤0.5W |
| Working Voltage              | AC 100-240V, 50/60Hz  |                                     |                                     |
| Touch Surface                | Optical Bonding Anti-Glare & Anti-Finger Print Glass                          |                                     |                                     |
| Transparency                 | 88%   |                                     |                                     |
| Surface Hardness             | 7H  |                                     |                                     |
| Touch Points                 | Up to 20 points in Windows  |                                     |                                     |
| Writing Tools                | Stylus or Finger  |                                     |                                     |
| Communication Interface      | USB-A   |                                     |                                     |
| Storage Temperature/Humidity | -20°C-60°C/20 - 80%   |                                     |                                     |
| Working Temperature/Humidity | 0°C-40°C/20 - 80%   |                                     |                                     |
| Mounting (optional)          | Wall-mounted / Floor Stand  |                                     |                                     |
| Outline Dimension            | 1546 x 944 x 89 mm  | 1771 x 1071 x 108 mm                | 2018 x 1211 x 104 mm                |
| Net Weight                   | 39 ± 1KG  | 51 ± 1KG                            | 65 ± 1.5KG                          |
| Front Interface Inputs       | HDMI 1.4(4K@30Hz) x 1, USB(Touch) x 1, USB(Dynamic) x 2                       |                                     |                                     |
| AV Inputs                    | HDMI 2.0/1.4 (4K@60Hz x 2, 4K@30Hz x 1), DP(4K@60Hz) x 1, USB(Touch) x 4      |                                     |                                     |
| AV Outputs                   | HDMI Out (Support 4k@60Hz)x 1, Line Out x1, SPDIF out                         |                                     |                                     |
| Other                        | USB2.0 x 2, USB 3.0 x 1, RS232 x 1, RJ45 x 2, OPS Slots(4K@60Hz),DC 5V-2A out |                                     |                                     |
| Intelligent thermo protector | Yes   |                                     |                                     |
| Build in Wi-Fi               | 2.4G/5G   |                                     |                                     |



## TRU TOUCH VN Series




Intuitive UX


### INPUTS / OUTPUTS

TRU TOUCH has various I/O ports that provide connectivity to visualizers, DVD players, and more.


#### Front Interface Inputs



#### Rear Bottom Ports



#### Rear Side Ports

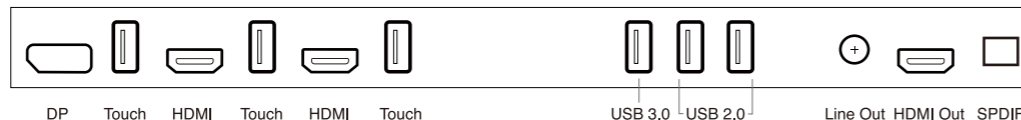

**Newline Interactive Inc.**  
101 East Park Blvd. Suite 807 Plano,  
TX 75074, USA  
TEL: +1 888 233 0868

**Want to buy:**  
info@newline-interactive.com  
**Become our partner:**  
partner@newline-interactive.com

**Europe office**  
Ronda de Poniente, N°2, 1ª planta,  
Oficina 1B, 28760, Tres Cantos,  
Madrid, Spain  
TEL: +34 911169178  
**Want to buy:**  
info\_eu@newline-interactive.com  
**Become our partner:**  
partner\_eu@newline-interactive.com

**Asia Pacific Office**  
4F-3, No.76 Sec.2, Jiafeng S. Rd,  
Zhubei City, Hsinchu Country,  
30272, Taiwan  
TEL: +886 35504768  
**Want to buy:**  
info\_ap@newline-interactive.com  
**Become our partner:**  
partner\_ap@newline-interactive.com

**India office**  
Room No. 203, No. 37, TTK Road,  
Alwarpet, Chennai,  
Tamil Nadu, India, 600018  
TEL: +91 4446945513  
**Want to buy:**  
info.in@newline-interactive.com  
**Become our partner:**  
partner.in@newline-interactive.com

## “ CREATIVITY THROUGH SIMPLICITY

Newline's new generation VN series features upgraded IR touch technology that is more responsive and offers the most intuitive and smoothest writing experience. The multi-function display is a perfect solution for higher education classrooms, seminar rooms, and corporate meeting rooms.



4K UHD



Annotation



1 to Many Presentation



Collaboration Hub



Conference



# Content x Simplicity = CREATIVITY



BYOD Ready



HDMI x 4  
Display Port x 1

Multi Interface Support




TRUCAST

Wireless Presentation




Optical Bonding

Personalized User Interface



20 Points Touch Support

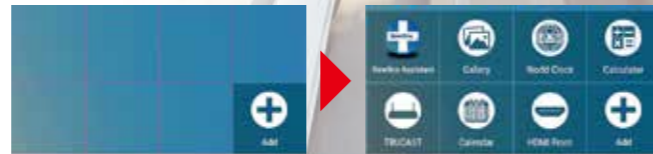

## Collaborate on Content Better, Together

TRUTOUCH VN series is designed for an intuitive user experience. It allows a seamless writing and co-working experience simultaneously. A powerful TRUTOUCH BYOD ready display enables the screen to be turned into a discussion board with a single touch. Productivity made easy!



## Superior Touch Experience

With the state-of-the-art touch technology, users can annotate with a writing stylus or fingers which is as natural as writing on papers.

4K  
UHD

## Clear and Robust Images

Capture your audience's attention when showing videos, image and presentations. TRUTOUCH VN series' 4K UHD resolution delivers clear and robust images, even when multiple users simultaneously project their screens in quadrant view.

## Maximized Viewing Angle

VN series adapt optical bonding technology that eliminates the gap between surface glass and display, and resulting in a 178° viewing angle. No matter where you sit in the meeting room, the image is just as clear.



## What's simpler?

Less clutter.  
Lower installation & setup time.  
Less weight & slim frame design.  
Less system limitations.

## What's better?

Brand new UI design.  
4K UHD that redefines clarity.  
20 Points Touch Support.  
Size selections from 65", 75" to 86".

Tools that evoke

# INSPIRATION

Welcome to the New Visual Era!  
TRUTOUCH VN series debuts with revolutionary innovation leading the way to a brand new user experience like you never expected.